


# POWER WINDOW CONTROL MODULE

## Features:

1. Automatic power window roll-up mechanism.
2. Power windows close the open windows automatically when the car doors are locked/armed.
3. Electronic or key controlled.
4. Compatible with any alarm system.
5. Intelligent circuit detects any non-functioning or obstructed windows. Stop supplies power to a closed or damaged window. Prevents the power motors and battery from overloading.
6. Suitable for 2 windows cars.

## Pte-Installation:

1. Plug the wire harness to the system control module.
2. Remove the fuse(30A) on the RED wire.
3. Find a mounting location for the system control module.
4. With the control moudle's mounting location determined, use the system layout and the supplied wire color and location charts as a reference to plan the wire harens routing and connection points.
5. Route the module wire along existing vehicle wiring harness to the target wire's location and cut the module wire to correct length. This will help to create a neat, factory locking installation.
6. Make sure and test all vehicles wires before making any connections.

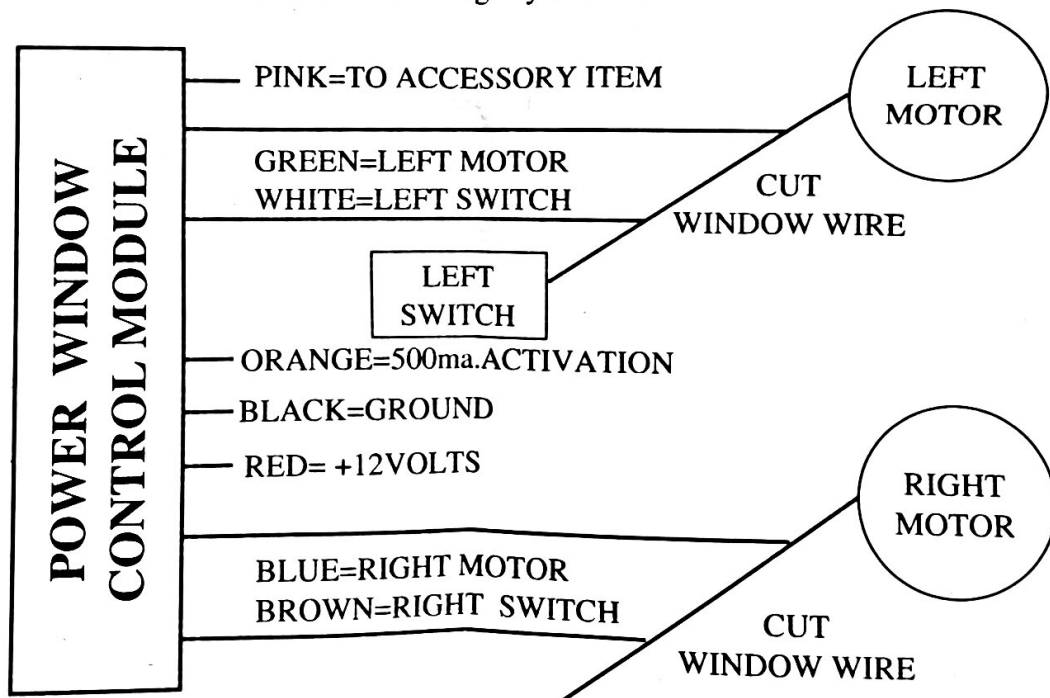

## Test:

1. Replace the fuse (30A) on the RED wire.
2. Open the door, roll down windows stop on the different heights.
3. Locked/armed the doors. Windows will close orderly and automatically.

## Important Notice:

1. The module is for negative chassis vehicles of 12V constant power.
2. This system is designed for professional installation. Don't attempt to open the module case, doing so will void all warranties. If service is required, return the product to an authorized dealer.